

BS 502

BRASS GATE VALVE


PN 20

Non-Rising stem

Conforms to PED 97/23/CE & it is CE marking-free as per art. 3 par. 3

ECI EUROPEAN
CASTING
INDUSTRY

www.ecivalve.it

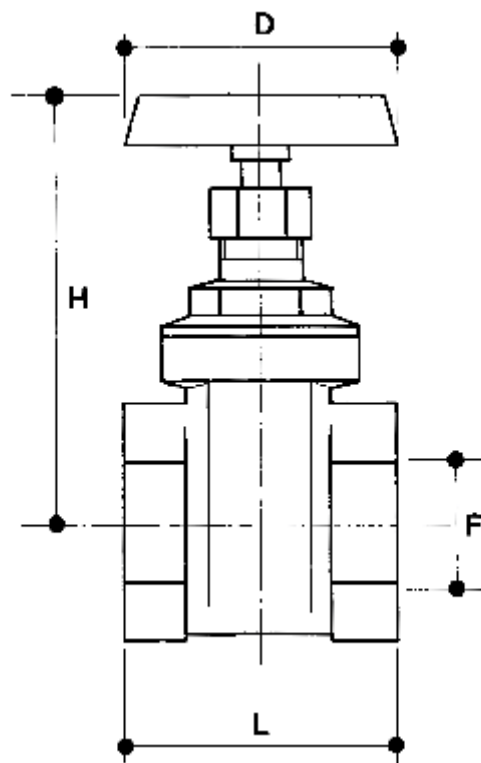

Specifications:

- PRESSURE RATING: PN20
- SUITABLE MEDIA: WATER, OIL & AIR
- WORKING TEMPERATURE: $T \leq 80^{\circ}\text{C}$
- TAPER PIPE THREAD TO NPT AND ISO 228/1

Dimensions (mm)

DN	SIZE INCH	F	L	H	D	WEIGHT KGS
15	½"	15	43	68	45	0.200
20	¾"	19	47	78	50	0.290
25	1"	24	53	92	55	0.400
32	1¼"	32	57	108	60	0.620
40	1½"	37	61	125	70	0.750
50	2"	47	67	143	80	1.240
65	2½"	60	74	175	100	1.900
80	3"	72	86	205	100	2.560
100	4"	93	98	235	120	4.640

Material

DESCRIPTION	MATERIAL
Body: Ø up to 2"	Brass CW 617 N-UNI-EN12165
Ø 2½" to 4"	Brass DELTA C EN1982 CB 7545
Bonnet	Brass CW 617 N-UNI-EN12165
Stem & Gland	Brass CW 614 N-UNI-EN12164
Packing	EPDM90 DUTRAL
Wedge	Brass DELTA C EN1982 CB 7545
Handwheel	Steel with red plastic coating
Handwheel Nut	Steel Zinc plated

ECI EUROPEAN
CASTING
INDUSTRY

All data, descriptions and pictures contained in this leaflet may be subject to change without prior notice.

European Casting Industry Srl | Via D'Azeglio 57 | 40123 Bologna BO, Italia | P.Iva: 03228761205 | www.ecivalve.it | info@ecivalve.it